

Technical Specifications

- Capacity: From 500 kg to 3000 kg
- Travel: 500 to 1500 mm
- Closed Height: 85 - 120 mm
- Length: 1200 - 1800 mm
- Width: 800 - 1350 mm
- CE-Marked and comply with European Norms and Standards
- 2 Safety lock for maintenance
- Safety trip bar in aluminum



NOTE: ALL DETAILS CAN BE CUSTOMIZED FOR YOUR NEEDS

OndLift is biggest manufacturer company in Lifting Tables sector in Turkey and exporting 32 countries.

OndLift' s Lift Tables series, designed for high lifting capacities and performance of applications.

OndLift' s Lift Tables series can be the manufacturing with different kind of options, such as mobile base, loading flaps, guard rails, rollers. (for detailed information, please check Lift Table Accessories Datasheet).

These stainless-steel scissors are manufactured from high quality materials with excellent corrosion resistant properties. The tables are suitable for use in food, pet food, pharmaceutical industries and abattoirs etc, where standards of hygiene are very important. Stainless steel tables are often used in wet environments as a consequence of manufacturing process or due to cleaning procedures. The tables are available in both 304 and 316 grade stainless steel with the option of 304 grade stainless steel hydraulic cylinders for high grade hygiene areas. These lift tables are built to customer specifications which provides for varying capacities, lifting heights, table sizes etc. Lifting capacities of up to 2000kg. Speak to our experienced sales team for more information. For more information www.ondlift.com

TUB.S.1**TUB.S.2**

Art No	Model	Capacity kg	Platform Dimension LxW mm x mm	Lift Stroke H mm	Closed Height C mm	Lift Time sec	Motor kW	Weight kg
71.06.001	TUB.S.1/06-08*	600	1450 x 1140	760	85	21	0,75	210
71.06.002	TUB.S.1/06-10*	600	1610 x 1140	970	85	25	0,75	230
71.10.003	TUB.S.1/10-08*	1000	1450 x 1140	760	85	21	0,75	280
71.10.004	TUB.S.1/10-10*	1000	1610 x 1140	970	85	25	0,75	300
71.15.005	TUB.S.1/15-08*	1500	1450 x 1140	760	85	25	1,1	310
71.15.006	TUB.S.1/15-10*	1500	1610 x 1140	970	85	30	1,1	330
71.20.007	TUB.S.1/20-08*	2000	1450 x 1140	760	100	28	1,5	330
71.20.008	TUB.S.1/20-10*	2000	1610 x 1140	970	100	32	1,5	350
76.06.001	TUB.S.2/06-08*	600	1450 x 1140	760	85	21	0,75	230
76.06.002	TUB.S.2/06-10*	600	1610 x 1140	970	85	25	0,75	250
76.10.003	TUB.S.2/10-08*	1000	1450 x 1140	760	85	21	0,75	350
76.10.004	TUB.S.2/10-10*	1000	1610 x 1140	970	85	25	0,75	380
76.15.005	TUB.S.2/15-08*	1500	1450 x 1140	760	85	25	1,1	350
76.15.006	TUB.S.2/15-10*	1500	1610 x 1140	970	85	30	1,1	380
76.20.007	TUB.S.2/20-08*	2000	1450 x 1140	760	100	28	1,5	400
76.20.008	TUB.S.2/20-10*	2000	1610 x 1140	970	100	32	1,5	420


* External power pack

Load Factors Accordance with EN1570-1

Maximum load refers to the load being uniformly distributed over the entire platform area in accordance with EN 1570 the basic requirements are;



100 % of maximum load uniformly distributed over the entire platform.





50 % of load weight uniformly distributed over half of the platform area lengthwise.





33 % of load weight uniformly distributed over half of the platform area sideways.

Technical Drawing

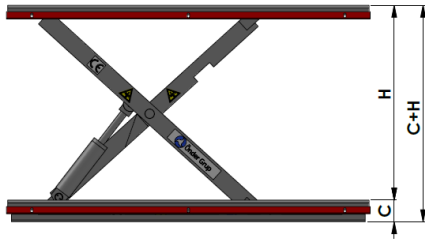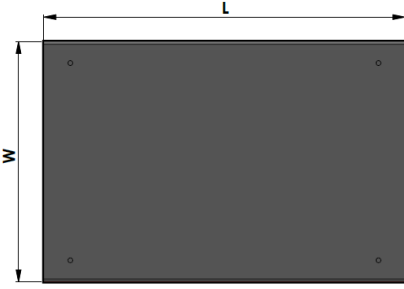

- L:** Platform Length
- W:** Platform Width
- C:** Closed Height
- H:** Stroke
- C + H:** Maximum Height

Technical Drawing

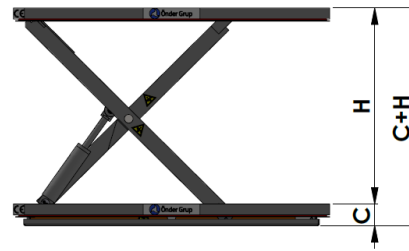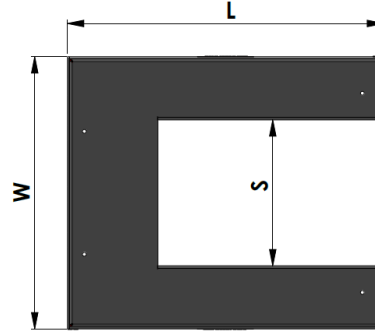

- L:** Platform Length
- W:** Platform Width
- C:** Closed Height
- H:** Stroke
- C + H:** Maximum Height

ONDLIFT Mak. San. Tic. Ltd. Şti

Factory: Organize Sanayi Bolgesi 2004 Cad. No: 4
Turgutlu/Manisa/TURKEY

Showroom: İmes San. Sit. C.302 Sk. No:13
Y.Dudullu/Umraniye/Istanbul/TURKEY

Tel: 0090 236 332 5050

ondlift@ondlift.com

Product specifications are subject to change without any notice or obligation. The photographs and/or drawing in this documents are for illustrative purpose only. All productions of OndLift, manufacturing for CE standards.

Turkey
Discover
the potential