

Unit Load Spiral

Small Footprint. Big Throughput.



The Ryson Unit Load - or - Case Spirals need less floor space than conventional conveyors and are faster and more reliable than any elevator or lift. They can convey all kinds of packaged goods in a continuous flow. Their proprietary modular design offers many

kinds of packaged goods in a continuous flow. Their proprietary modular design offers many features and benefits and can help lower your total cost of ownership.

O Easy to Install:

Most spirals are shipped in one piece, pre-assembled and pre-tested, drastically reducing time and cost of installation.

Modular Design:


Our unique design offers flexibility of configuration. It also add the ability to field modify to accommodate changin future needs at a fractior the cost of a new convey

O Low Maintenance:

Our Spirals and components are designe for reliability, low maintenance and long li They have an impressive up-time record reducing the total cost of ownersh

Built-in Protectio

All Ryson Spirals are equipped with an automatic chain tensioning device and built-in overload protection ensuring safe and reliable operation.

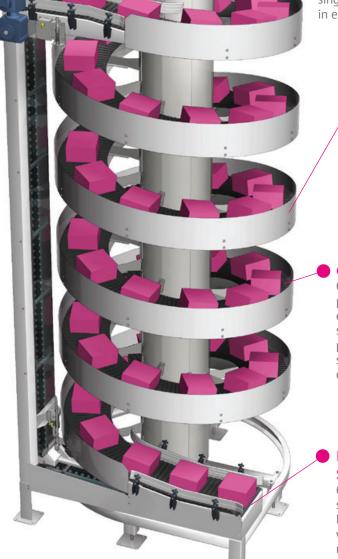

Single Drive: Our efficient rolling friction chain-slat design only needs a single drive, resulting in substantial savings in energy, controls and systems integration.

Finishes: Ryson Spirals are available in powder coated carbon steel, stainless steel wet, hybrid and freezer versions, providing the most economical solution to the operating environment.

Overlapping Slats:

Overlapping slats provide a smooth and efficient conveying surface, ensuring gentle product handling and suitable for all types of conveyable items.



Proprietary Belt Slat:

Our innovative chainslat design enables a low friction operation without any sliding



movements or wear-strips. This allows the Spiral to stop and start fully loaded.



Scan or Click for full details Controls and Integration: Most Spirals are shipped without controls because they typically integrate with an overall conveyor control system. We do offer a number of controls and pre-wiring options. A Variable Frequency Drive (VFD) is required for proper operation of the spirals.



Quick Facts:

Top Speed:	200 FPM*
Max Height:	45'*
Slat Width:	6" - 36"
Weight Capacity:	75 lbs/lin foot ^{**}
Total Weight:	Up to 1800 lbs"
VFD Required:	Yes
Optional Controls:	Yes
Custom Options:	Yes
Color Options:	RAL colors
Incline Angle:	Up to 12.5°

* Depending on model ** For Standard Capacity, high capacity is double

Slat Width


Outside Diameter Slat Width Frame Width Centerline Diameter

Frame

Configurations:

All Ryson Spiral Conveyors are available in several standard versions to accommodate a wide range of loads and applications.

- The Spiral Conveyors can be configured to go up or down, clockwise or counterclockwise and can optionally be reversible.
- All models can be built with extended infeed or outfeed tangents, making our Spiral Conveyors an easy to fit and help simplify the most challenging of layouts.



Examples o	f custom/	extended	tangents
------------	-----------	----------	----------

Powder Coated Carbon Steel

Part	Specifications
Frame	Coated aluminium tube with galvanized load arms
Chain configuration	Nickel plated chain, carbon steel bearings
Finish	Powder Coated in most RAL colors

Stainless Steel Hybrid (Dry)

Part	Specifications
Frame	Coated aluminium center tube zinc plated load arms
Chain configuration	Nickel plated chain, carbon steel bearings
Finish	Stainless steel base frame, legs & side guards.

Stainless Steel (Wet)

Part	Specifications
Frame	Stainless steel or coated aluminium tube depending on model. Stainless steel base frame, load arms & fasteners.
Chain configuration	Nickel plated chain with stainless steel sealed bearings
Finish	Stainless steel base frame, legs & side guards.





ROYAL APOLLO Group

Shrink

VERTICAL CONVEYING SOLUTIONS. WORLDWIDE.

Ryson is a member of the Royal Apollo Group, established in 1847 and headquartered in the Netherlands. Ryson manufactures in USA and supports North America. We have manufacturing in Netherlands, USA, and Thailand with service operations in Netherlands, USA, Thailand, China, India, and Mexico. As one global company, we are the world's leader in Vertical Conveying!

	Diameter	Diameter		witti
1200-300	5'-3"	3'-11"	12"	15"
	(1600)	(1200)	(300)	(380)
1300-400	5'-11"	4'-3"	16"	19"
	(1800)	(1300)	(400)	(480)
1500-400	6'-7"	4'-11"	16"	19"
	(2200)	(1500)	(400)	(480)
1800-400	7'-7"	5'-11"	16"	19"
	(2300)	(1800)	(400)	(480)
1600-500	7'-3"	5'-3"	20"	23"
	(2200)	(1600)	(500)	(590)
1800-650	8'-6"	5'-11"	26"	29"
	(2600)	(1800)	(650)	(740)

Centerline

Check out our Narrow Trak, Wide Track and Mass Flow models for additional size information

Typically Conveys:

Туре



Cartons

Totes



Outside



Jugs



Crates

Pails





Bundles