


NEW



SIMPLY THE BEST 1,200 x 1,000 mm

TC3-5

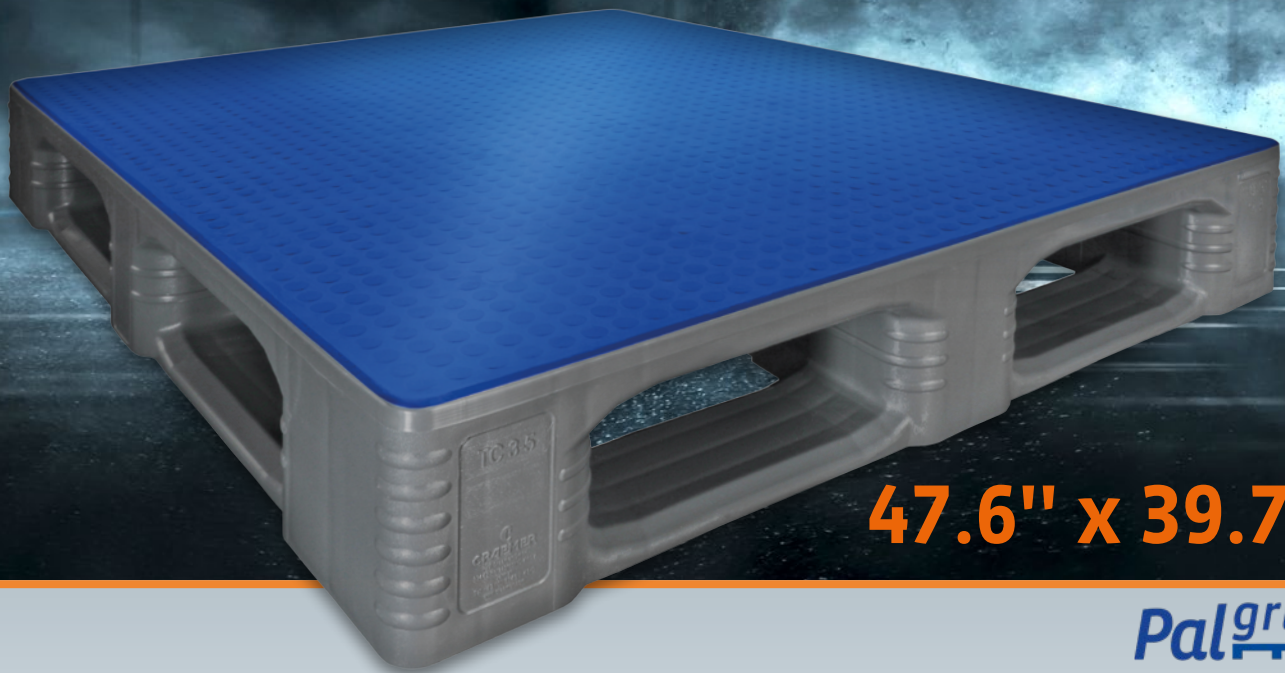


47.6" x 39.7"

Palgrip


A CONTRIBUTION TO THE CIRCULAR ECONOMY

REUSE & REDUCE WASTE

1,200










1,000

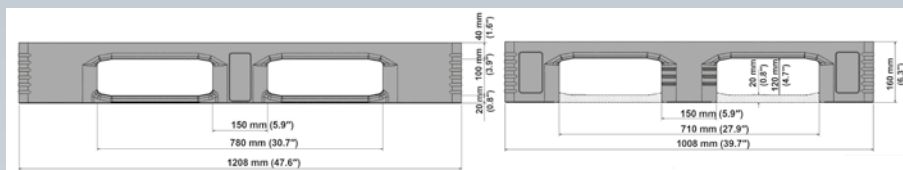

GERMAN ENGINEERING SINCE 1912

TC3-5 Palgrip 1,200 x 1,000 mm





Technical data* ¹		
Dimensions (in) L x W x H	47.6 x 39.7 x 6.3" (1200 x 1000 x 160 mm)	
Material* ²	PE	
Weight (lb)	without steels rods	52 (23.5 kg)
	with 5 steel rods	62 (28 kg)
Load capacities (lb)* ³	 Static	16500 (7500 kg)
	 Dynamic	3300 (1500 kg)
	 In racking system	2800 (1250 kg)
	 Static	16500 (7500 kg)
	 Dynamic	4400 (2000 kg)
	 In racking system	4400 (2000 kg)

Characteristics


- Color: light grey / blue
- **Palgrip**® anti-slip top deck
- Runners: 5
- Reinforcement rods: 0 or 5
- Temperature stability (°F): -22 to +104, briefly up to 194

Loading quantities (pcs/approx.)

 Container	40' High Cube: 340	 Truck	Dry Van: 420
---	---------------------------	---	---------------------

Labelling options

Customized printing and numbering available on request depending on quantity. Ask about label position options.



Do you have questions or require detailed information? We are happy to advise you.

Germany (Headquarters)
Craemer GmbH
Brockler Straße 1
33442 Herzebrock-Clarholz
E-mail: info@craemer.com
www.craemer.com/en

United States of America
Craemer US Corporation
30725 US HWY 19 N #304
Palm Harbor, FL 34684
E-Mail: info@craemer.com
www.craemer.com/usa

www.craemer.com

*¹ All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

*² Our service team is pleased to be at your disposal if you require exact information about material compositions.

*³ Load capacities refer to the equipment with 5 reinforcement rods.

Static load: resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 68 °F. **Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 68 °F. **In racking system:** evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 hours at a room temperature of approx. 68 °F.