

TOBi™ Battery Companion



TOBi - Your Bluetooth Enabled Battery Companion

*Effortless battery care, event records, now
compatible with iOS and Android.*

Primary Benefits



Bluetooth Compatible

iOS and Android Compatible



Waterproof Design

Waterproof and Battery Acid
Resistant



Comprehensive Reports

TOBi Report Suite




Versatile Compatibility

For Use on 12-80V Batteries



Communicates Automatically

To the 305 Control

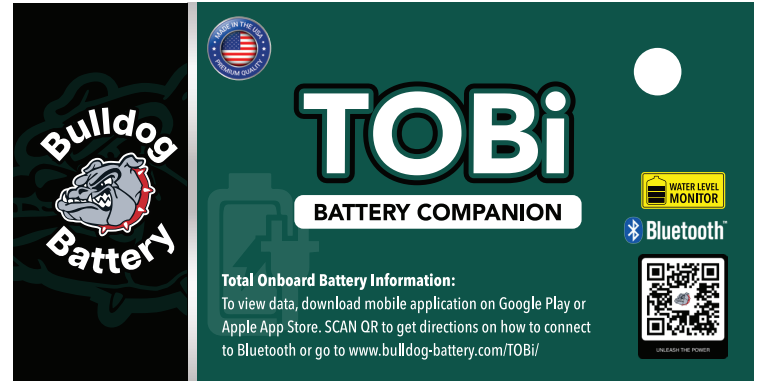

Discover seamless battery management with Bulldog Battery's TOBi™. This sleek device, only 3 inches long, 1.5 inches wide, and 0.41 inches high, revolutionizes the way you care for batteries. Compatible with both iOS and Android via Bluetooth, it features a waterproof casing and syncs automatically with the 305 control system. Simplify your battery maintenance effortlessly with TOBi.

The Bulldog TOBi further enhances this innovation by streamlining battery maintenance to be more time-efficient and cost-effective, thus eliminating disruptions. Traditional approaches, which involve taking lift trucks out of operation for battery removal and manual checks, hinder productivity.

In contrast, TOBi utilizes advanced, Bluetooth enabled (iOS and Android Compatible) wireless technology to create effortless battery care and event records. Data can be collected without stopping operations.

The benefits of adopting TOBi include extended battery life, consistent performance, reduced maintenance costs, and less labor, making it an indispensable tool for optimizing your battery fleet.


Each Bulldog battery comes equipped with TOBi at no additional charge, which continuously tracks and logs vital performance data and wirelessly transfers it for analysis, ensuring maintenance is both timely and specifically tailored to your operational needs.



TOBi Battery Companion (continued)



Bulldog Battery

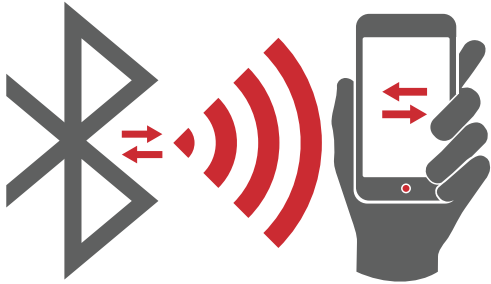

Download Application Interface




VIDEO INSTALLATION INSTRUCTIONS



Battery ID	Factory ID	State	Volts	V/C	Amps	AH	S.O.C.	Temp.	Avg. Temp.	Event (Bat.)	Event (File)	H2O
Dock Door 36	0000003C4401	IDLE	12.2	2.03	0	0	8%	73	72	41	41	LOW

Charger ID	Factory ID	State	Volts	V/C	Amps	AH	Charge Time	Battery Temp.	Battery ID
00000040F9E8	00000040F9E8	READY FOR BATTERY	0.0	0.00	0	0	0:00	NA	NA

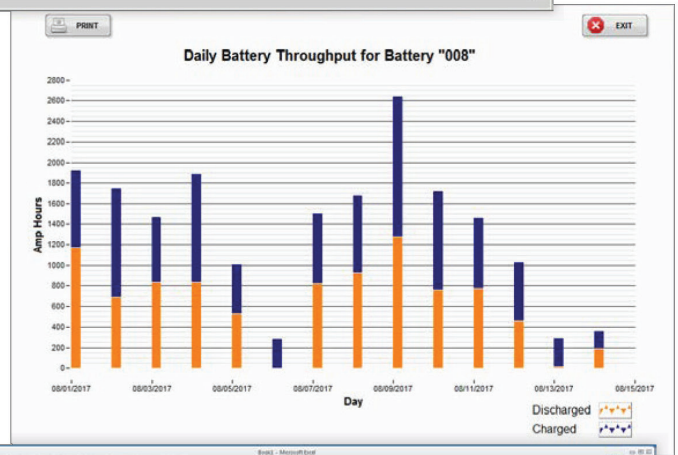

ID	Plant/MS	CHARGE TIME	COLLECTOR TIME	USE OFF CHARGE	MAX AMPS	AM USED	MIN VOLTS	MAX VOLTS	MIN VOLT	MAX TEMP	MIN TEMP	EQ CHARGES	MAX ICH	STATUS LOW	
1	0000	0	0:14	0:00	0:00	0	0	0.7	6.6	71	68	0	1.01	0:00	
2	0000	0	0:09	0:00	0:00	0	0	0.9	7.9	70	62	0	0.98	0:00	
3	0000	0	0:10	0:00	0:00	0	0	0.90	2.46	71	71	0	0.91	0:00	
4	0000	0	0:10	0:00	0:00	0	0	0.90	2.00	71	70	0	0.94	0:00	
5	0000	0	0:09	0:00	0:00	0	0	0.90	2.18	63	70	0	0.99	0:19	
6	0000	2:27	0:00	0:00	0:00	0	0	0.07	6.6	70	68	0	0.94	0:00	
7	0000	0	0:11	0:00	0:00	0	0	0.90	1.61	71	70	0	0.98	0:00	
8	0000	0	0:10	0:00	0:00	0:07	35	0	2.27	61	71	0	0.96	0:11	
9	0000	0	0:11	0:00	0:00	0	0	0.90	2.02	61	70	0	0.98	0:00	
10	0000	10%	48:11:00	81:30:30	52:14:30	0.75	25.1	6.36	0	7.9	61	80	0	0.94	0:00
11	0000	100%	00:00:00	00:00:00	0:00	0	0	0.90	0	69	68	0	0.94	0:00	
12	0000	0	0:09	0:00	0:00	0	0	0.90	2.00	71	70	0	0.94	0:00	
13	0000	0	0:09	0:00	0:00	0	0	0.90	2.13	68	71	0	0.98	0:00	
14	0000	0	0:08	0:00	0:00	0	0	0.90	1.61	71	70	0	0.98	0:00	
15	0000	0	0:10	0:00	0:00	0	0	0.90	2.08	71	71	0	0.91	0:00	
16	0000	0	0:09	0:00	0:00	0	0	0.90	2.11	70	71	0	0.97	0:00	
17	0000	0	0:08	0:00	0:00	0	0	0.90	2.18	71	71	0	0.94	0:00	
18	0000	0	0:08	0:00	0:00	0	0	0.90	2.18	71	71	0	0.97	0:00	
19	0000	0	0:09	0:00	0:00	0	0	0.90	2.00	71	71	0	0.93	0:00	
20	0000	0	0:09	0:00	0:00	0	0	0.90	2.00	71	71	0	0.98	0:00	
21	0000	0	0:11	0:00	0:00	0	0	0.90	2.27	71	70	0	0.98	0:00	



Unleash The Power

800.443.3492
bulldog-battery.com
salesdept@bulldog-battery.com

